

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization  
International Bureau



(43) International Publication Date  
31 July 2003 (31.07.2003)

PCT

(10) International Publication Number  
**WO 03/062802 A2**

(51) International Patent Classification<sup>7</sup>: G01N 21/47,  
A61B 3/00, G01B 9/02

(21) International Application Number: PCT/US03/02349

(22) International Filing Date: 24 January 2003 (24.01.2003)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:  
60/351,904 24 January 2002 (24.01.2002) US  
10/136,813 30 April 2002 (30.04.2002) US

(71) Applicant (for all designated States except US): **THE GENERAL HOSPITAL CORPORATION** [US/US]; 55 Fruit Street, Boston, MA 02114 (US).

(72) Inventors; and


(75) Inventors/Applicants (for US only): **DE BOER, Johannes, Fitzgerald** [US/US]; 60 C Marshall Street, Somerville, MA 02145 (US). **TEARNEY, Guillermo, J.** [US/US]; 118 Kinnaird Street, #3, Cambridge, MA 02139 (US). **BOUMA, Brett, Eugene** [US/US]; 12 Monmouth Street, Quincy, MA 02171 (US).

(74) Agent: **BERNSTEIN, Jason, A.**; Bernstein & Associates, P.C., 6600 Peachtree Dunwoody Road, N.E., Embassy Row 400, Suite 495, Atlanta, GA 30328-1649 (US).

(81) Designated States (national): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, OM, PH, PL, PT, RO, RU, SD, SE, SG,

[Continued on next page]

(54) Title: APPARATUS AND METHOD FOR RANGINGS AND NOISE REDUCTION OF LOW COHERENCE INTERFEROMETRY LCI AND OPTICAL COHERENCE TOMOGRAPHY (OCT) SIGNALS BY PARALLEL DETECTION OF SPECTRAL BANDS

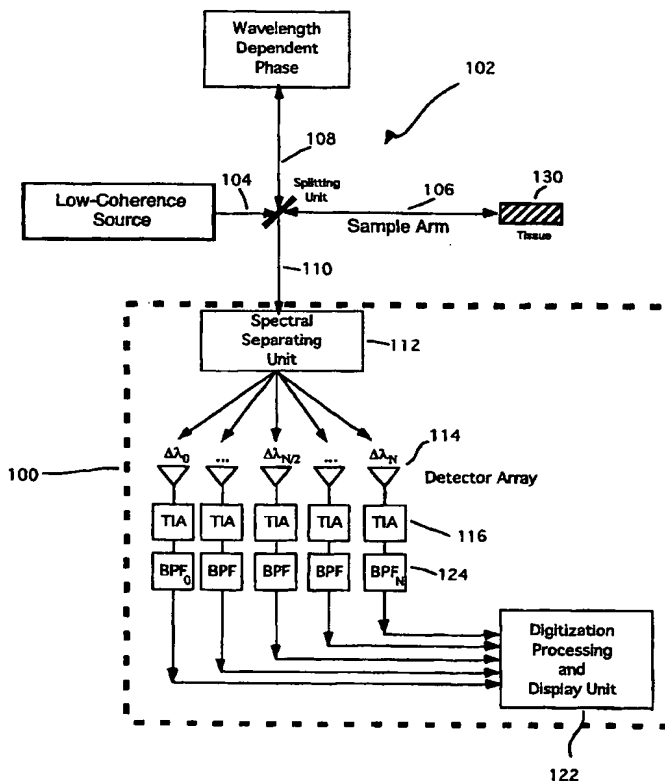

(57) **Abstract:** Apparatus, method, logic arrangement and storage medium are provided for increasing the sensitivity in the detection of optical coherence tomography and low coherence interferometry ("LCI") signals by detecting a parallel set of spectral bands, each band being a unique combination of optical frequencies. The LCI broad bandwidth source can be split into N spectral bands. The N spectral bands can be individually detected and processed to provide an increase in the signal-to-noise ratio by a factor of N. Each spectral band may be detected by a separate photo detector and amplified. For each spectral band, the signal can be band pass filtered around the signal band by analog electronics and digitized, or, alternatively, the signal may be digitized and band pass filtered in software. As a consequence, the shot noise contribution to the signal is likely reduced by a factor equal to the number of spectral bands, while the signal amplitude can remain the same. The reduction of the shot noise increases the dynamic range and sensitivity of the system.

WO 03/062802 A2